


SERIE NR. 27301-28501
1 FABRIKASJON.

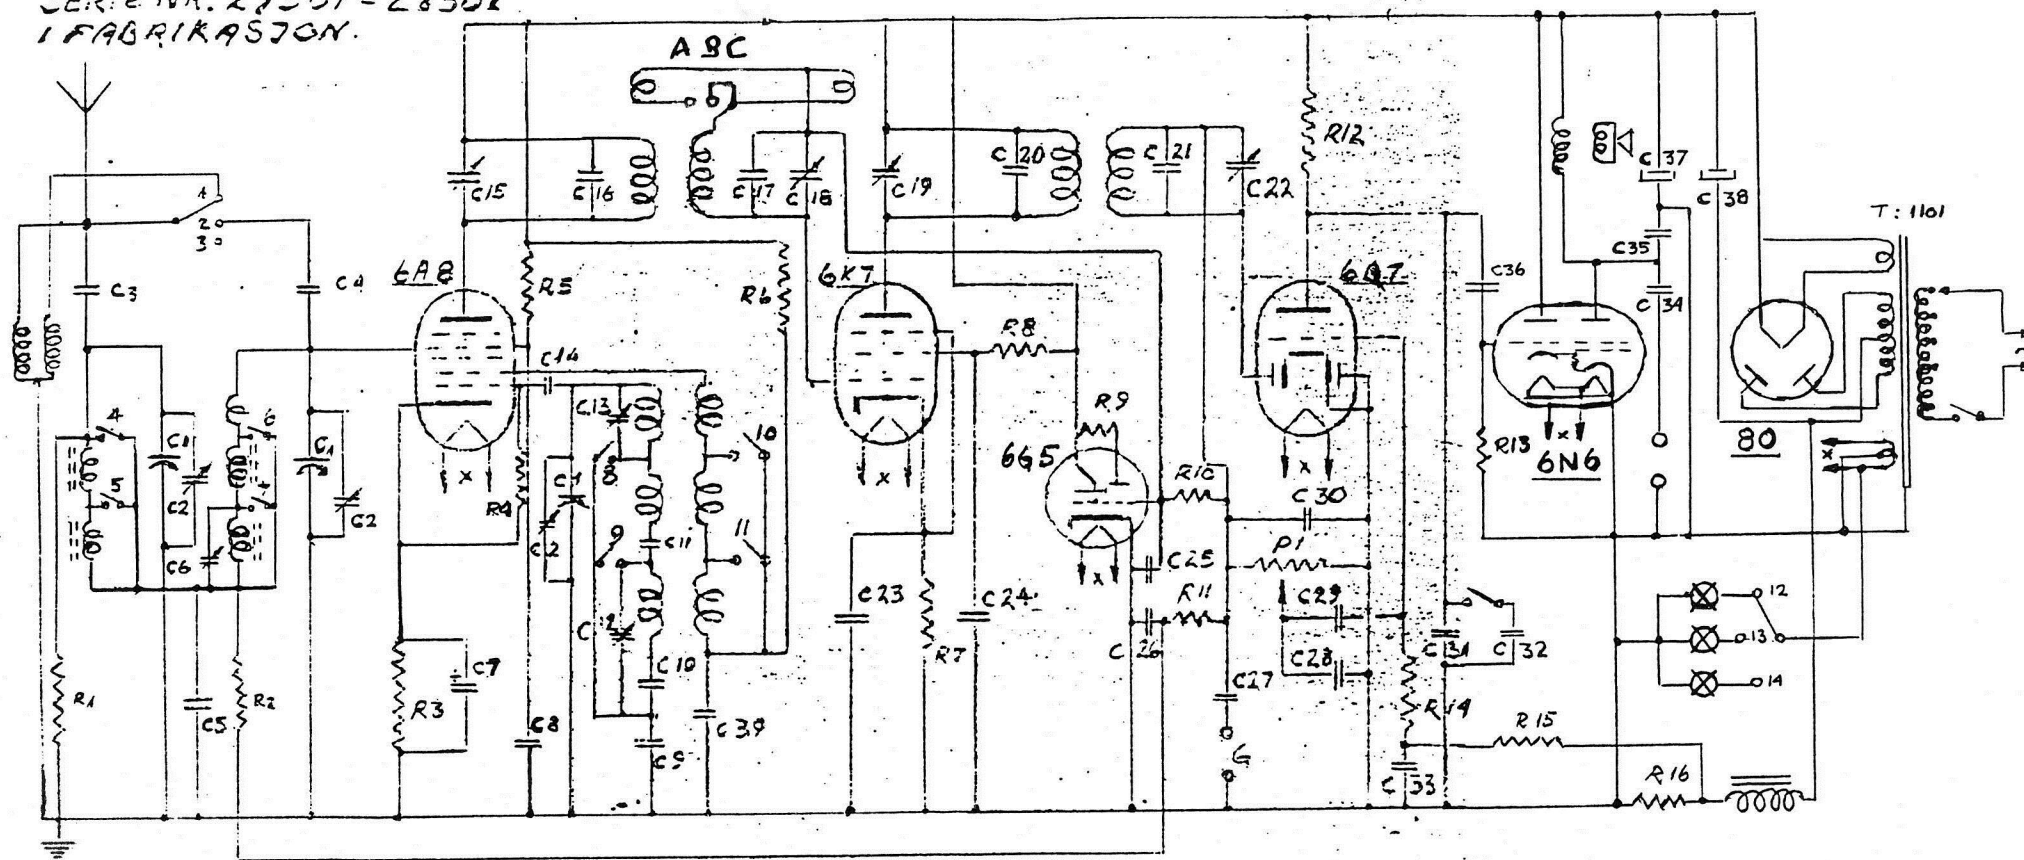

BOLGE V.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
MELLOMB														
KORT B.														
LANG B.														

TONEKONTROLL	A	B	C
FULL TONE			
SELEKTIV			
— * — MARK			

SKIEMA VM

OSLO 10/4-36

Motstands - og kondensatorverdier for Radionette Verdensmottager 1936
 serie nr. 27501 - 28500
 med rørserie: 6A8, 6K7, 6G5, 6Q7, 6N6, 80

R 1 = 20 kohm	C 1 = 3 x 455 pf	C19 = 5 - 40 pf trim
R 2 = 350 kohm	C 2 = 3 x 55 pf	C20 = 120 pf
R 3 = 300 kohm	C 2 = 19 pf	C21 = 120 pf
R 4 = 50 kohm	C 4 = 19 pf	C22 = 5 - 40 pf trim
R 5 = 50 kohm	C 5 = 20 000 cm	C23 = 0.1 mfarad, 1500 v.
R 6 = 20 kohm	C 6 = 5 - 40 pf trim	C24 = 0.1 mfarad, 1500 v.
R 7 = 300 ohm	C 7 = 0.1 pf	C25 = 0.1 mfarad, 1500 v.
R 8 = 100 kohm	C 8 = 0.1 pf	C26 = 0.1 mfarad, 1500 v.
R 9 = 1 mohm	C 9 = 5750 pf	C27 = 20 000 cm
R 10 = 2 mohm	C10 = 770 pf	C28 = 200 cm
R 11 = 2 mohm	C11 = 2150 pf	C29 = 5 000 cm
R12 = 350 kohm	C12 = 5 - 40 pf trim	C30 = 120 pf
R13 = 2 mohm	C13 = 5 - 40 pf	C31 = 200 cm
R14 = 2 mohm	C14 = 50 cm	C32 = 2 000 cm
R15 = 2 mohm	C15 = 5 - 40 pf trim	C33 = 0.1 mfarad
R16 = 30 ohm tråd	C16 = 120 pf	C34 = 0.1 mfarad
P1 = potmtr 0.5 mohm	C17 = 120 pf	C35 = 2 000 dm
	C18 = 5 - 40 pf trim	C36 = 5 000 cm, 1500 v.
		C37 = 8 mfarad, 600 v.
		C38 = 8 mfarad, 600 v.
		C39 = 5 000 cm