

TL 1210

Technical specification:

| | |
|-----------------------------------|--|
| Dimensions | : B: 16 3/4" (41.5 cm), H: 9 1/2" (23.5 cm), D: 7 3/4" (19 cm) |
| Internal volume | : 0.45 cu.ft. (12.5 l) |
| Weight | : 10.8 lb (4.8 kg) |
| Impedance | : 4 to 8 ohms |
| Crossover frequency | : 3500 Hz |
| Resonance frequency | : 70 Hz |
| Frequency range (DIN 45570) | : 45 to 20000 Hz |
| Sensitivity (DIN 45500) | : 4 Watts |
| Max. continuous power (DIN 45573) | : 25 Watts |



Complement:

| | | |
|----------------------------|----------------------------|-----------------|
| * Woofer | : HTC 113, 4 ohms, 6 1/2", | part No. 264133 |
| Tweeter | : HT 125, 4 ohms, 2 1/4", | part No. 267215 |
| Gasket behind the tweeter, | | part No. 271935 |

Crossover filter components:

| | | |
|---------------|----------------|-----------------|
| Filter board: | | part No. 994702 |
| L1: | 2 mH, | part No. 980166 |
| L4: | 0.4 mH, | part No. 980150 |
| C1: | 20 μ F, | part No. 282358 |
| C4: | 10 μ F, | part No. 280677 |
| R1: | 2.2 ohms, 2 W, | part No. 265433 |

Diagram:

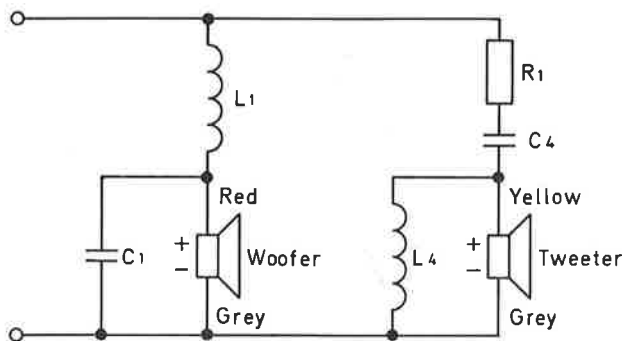

HTC 113 seen from behind.

Notes:

* Alternative woofer: HTD 113, part No. 307027.