HI FI 20

Technical specification:

Dimensions :B:17 3/4" (44 cm), H:9" (22 cm), D:7 3/4" (19 cm)

Internal volume : 0.45 cu.ft. (12.5 l)
Weight : 11.3 lb (5.5 kg)

Impedance: 4 ohmsCrossover frequency: 3500 HzResonance frequency: 70 Hz

Frequency range (DIN 45570) :45 to 18000 Hz

Sensitivity (DIN 45500) :4 Watts Max. continuous power (DIN 45573) :25 Watts

Complements:

Woofer: :HTC 113, 4 ohms, 6 1/2", part No. 264133 Tweeter :HT 125, 4 ohms, 2 1/4", part No. 267215

Gasket for the tweeter: part No. 271935

Crossover filter components:

Filter board: part No. 994704


L1: 0.12 mH, part No. 980148 L2: 0.15 mH, part No. 980149

C1: 12 µF, part No. 277754
C2: 8 µF, part No. 276109

C3: 5 µF, part No. 275074

R1: 2.2 ohms, 2 W, part No. 265433

Diagram:

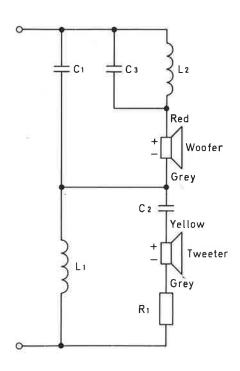



HTC 113 seen from behind.

Notes:

To gain access to the tweeter, the perforated strip must be removed. Be careful to avoid damaging to the cabinet.

When the loudspeakers are being replaced with new ones, be careful to get the phasing of the new speakers correct.